


KEY FEATURES

- Open Frame Switching Power Supply
- 180 Watt with 18CFM FAN for 12V to 48V Output Voltage
- 150 Watt with 30CFM FAN for 5V Output Voltage
- High Efficiency up to 93%
- Universal Input: 90-264 VAC
- Low Ripple and Noise
- With P.F.C. Function >0.95
- 120 Watt with Free Air Convection
- Ultra Compact Size: 5.0 x 3.0 x 1.16 Inches
- 3-Year Product Warranty

120W SERIES

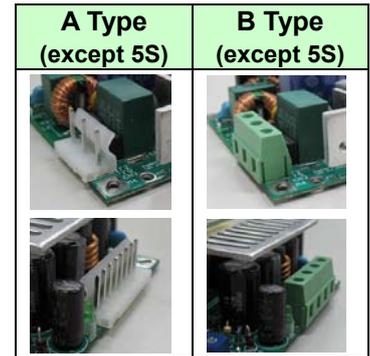

ELECTRICAL SPECIFICATIONS




All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No.	FSP120PWVS005O	FSP120PWVS012O	FSP120PWVS015O	FSP120PWVS024O	FSP120PWVS048O
Max Output Wattage (W)	150 W (30CFM FAN)	180 W (18CFM FAN)			
Max Output Wattage (W)	100 W	120 W			
Input	Voltage				
	90-264 VAC or 120-370 VDC (80-274 VAC or 110-390 VDC with Derating)				
	Frequency (Hz)				
	47-63 Hz				
	Current (Full load)				
	<2.0 A max. (115 VAC) / <1.0 A max. (230 VAC)				
Inrush Current (<2ms)					
< 30 A max. (115 VAC) / < 60 A max. (230 VAC)					
Leakage Current					
< 0.5 mA max.					
Power Factor					
PF>0.99 (115 VAC) / PF>0.95 (230 VAC) at Full Load					
Output	Voltage (V.DC.)				
	5V	12V	15V	24V	48V
	Voltage Accuracy				
	±2%				
	Voltage Adj. Range (V.DC)				
	4.7~5.3V	11.4~13.2V	13.5~16V	22.8~26.4V	45.6~52V
	Current (18/30 CFM FAN)(A) max				
	0~30 (30CFM FAN)	0~15 (18CFM FAN)	0~12 (18CFM FAN)	0~7.5 (18CFM FAN)	0~3.75 (18CFM FAN)
	Current (Convection) (A) max				
	0~20	0~10	0~8	0~5	0~2.5
	Line Regulation				
	±1%				
	Load Regulation				
±1%					
Minimum Load					
5%	1%				
Maximum Capacitive Load					
100,000µF	40,000µF	35,000µF	20,000µF	1,200µF	
Ripple & Noise (max.)					
100mV	50mV	50mV	100mV	200mV	
Efficiency (typ.)					
87%	90%	90%	93%	93%	
Hold-up Time					
15 ms min.					
Protection	Over Power Protection				
	Auto recovery				
	Over Voltage Protection				
Auto recovery (> 125% Vout)					
Short Circuit Protection					
Auto recovery					
Isolation	Input-Output (V.AC)				
	4000VAC or 5656VDC				
	Input-FG (V.AC)				
2000V					
Output-FG (V.AC)					
500V					
Environment	Operating Temperature				
	-25°C...+70°C (with derating)				
	Storage Temperature				
	-25°C...+85°C				
	Temperature Coefficient				
	±0.03%/°C (0~50°C)				
Humidity					
95% RH					
MTBF					
>120,000 h @ 25°C (MIL-HDBK-217F, Notice 1)					
Vibration					
10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes.					
Physical	Dimension (L x W x H)				
	5S:	5.0 x 3.0 x 1.24 Inches (127.0 x 76.2 x 31.5 mm) Tolerance ±0.5 mm			
	others:	5.0 x 3.0 x 1.16 Inches (127.0 x 76.2 x 29.5 mm) Tolerance ±0.5 mm			
Weight					
5S:350 g / others:280 g					
Cooling Method					
Free convection / 18 CFM FAN					
Safety	Agency Approvals				
CE, UL60950-1(except 5S / 15S), CB(except 5S / 15S)					
EMC	EMI (Conducted & Radiated Emission)				
	EN61000-6-3 · EN 55032 class B				
EMS (Noise Immunity)					
EN 55024					

NOTE


1. Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
2. Hold-up Time measured at 90% Vout.
3. Strongly recommend to conduct this test with DC Voltage customer wishes to test with AC Voltage, please disconnect all Y-Capacitors within power supply.

DERATING

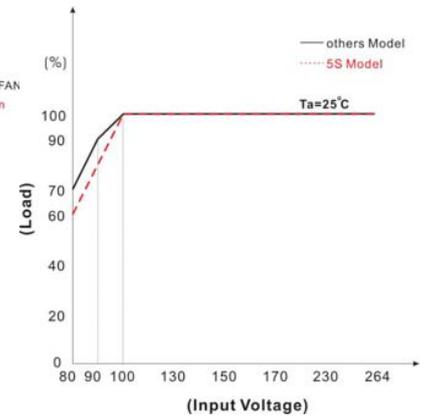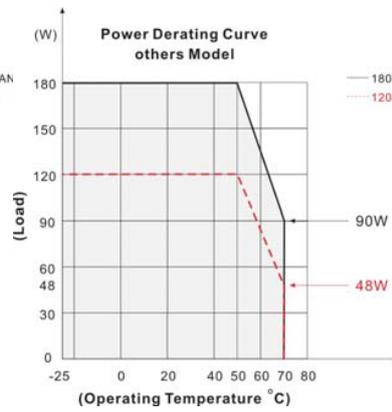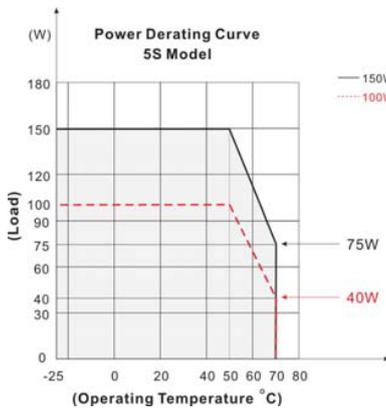

BLOCK DIAGRAM

Single Output

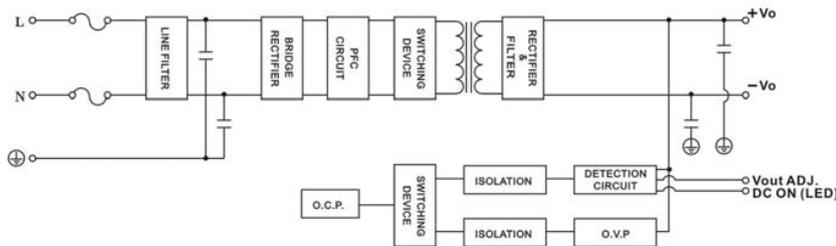

MECHANICAL DIMENSION (Top View)

Standard (5V)

PIN#	Single
1	AC IN (L)
2	AC IN (N)
3	FG
4	+DC OUT
5	-DC OUT



Standard (12V · 15V · 24V · 48V)

PIN#	Single
1	AC IN (L)
2	AC IN (N)
3	FG
4	+DC OUT
5	+DC OUT
6	-DC OUT
7	-DC OUT

MECHANICAL DIMENSION (Top View)

A Type (except 5V)	B Type (except 5V)																								
<table border="1"> <thead> <tr> <th>PIN#</th> <th>Single</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AC IN (L)</td> </tr> <tr> <td>2</td> <td>AC IN (N)</td> </tr> <tr> <td>3</td> <td>FG</td> </tr> <tr> <td>4 ~ 7</td> <td>+DC OUT</td> </tr> <tr> <td>8 ~ 11</td> <td>-DC OUT</td> </tr> </tbody> </table>	PIN#	Single	1	AC IN (L)	2	AC IN (N)	3	FG	4 ~ 7	+DC OUT	8 ~ 11	-DC OUT	<table border="1"> <thead> <tr> <th>PIN#</th> <th>Single</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AC IN (L)</td> </tr> <tr> <td>2</td> <td>AC IN (N)</td> </tr> <tr> <td>3</td> <td>FG</td> </tr> <tr> <td>4 ~ 5</td> <td>+DC OUT</td> </tr> <tr> <td>6 ~ 7</td> <td>-DC OUT</td> </tr> </tbody> </table>	PIN#	Single	1	AC IN (L)	2	AC IN (N)	3	FG	4 ~ 5	+DC OUT	6 ~ 7	-DC OUT
PIN#	Single																								
1	AC IN (L)																								
2	AC IN (N)																								
3	FG																								
4 ~ 7	+DC OUT																								
8 ~ 11	-DC OUT																								
PIN#	Single																								
1	AC IN (L)																								
2	AC IN (N)																								
3	FG																								
4 ~ 5	+DC OUT																								
6 ~ 7	-DC OUT																								

EFFICIENCY VERSUS LOAD

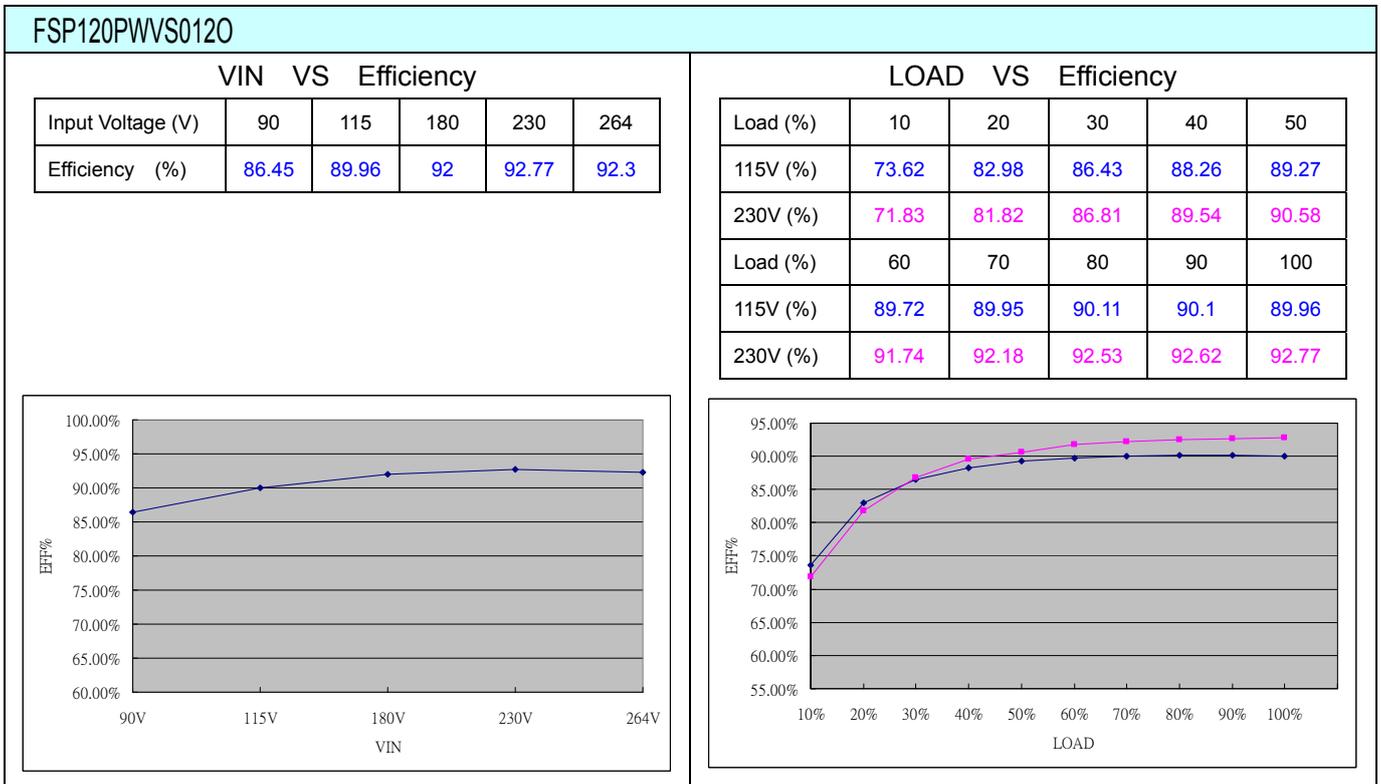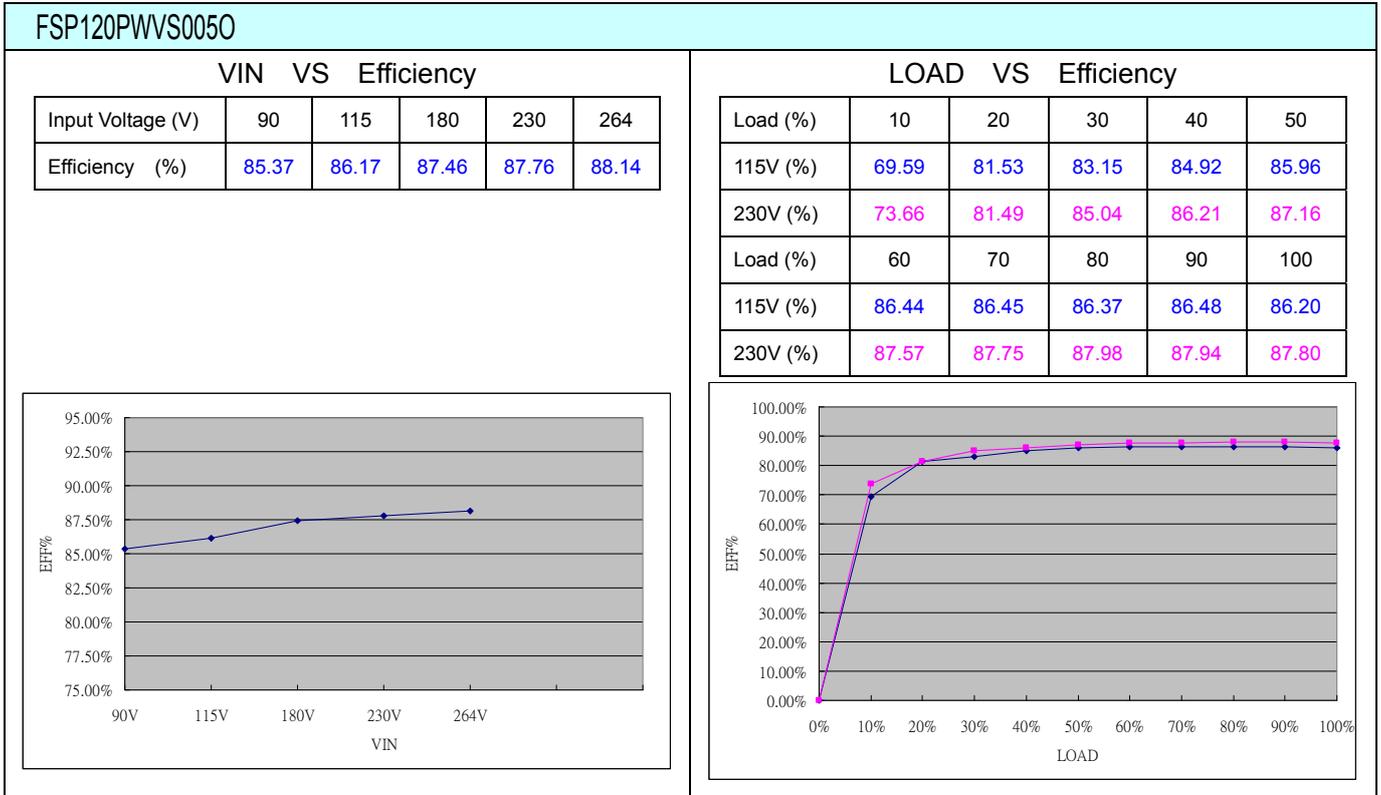


EFFICIENCY VERSUS LOAD

FSP120PWVS0150


VIN VS Efficiency

Input Voltage (V)	90	115	180	230	264
Efficiency (%)	86.03	88.78	90.06	90.45	90.75

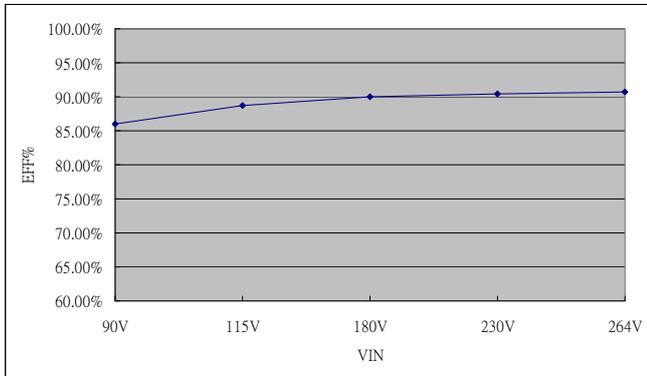

LOAD VS Efficiency


Load (%)	10	20	30	40	50
115V (%)	67.05	78.17	82.74	85.07	85.52
230V (%)	67.05	77.17	82.17	84.61	86.14
Load (%)	60	70	80	90	100
115V (%)	87.40	88.34	88.44	88.67	88.78
230V (%)	87.39	88.68	89.5	90.14	90.45

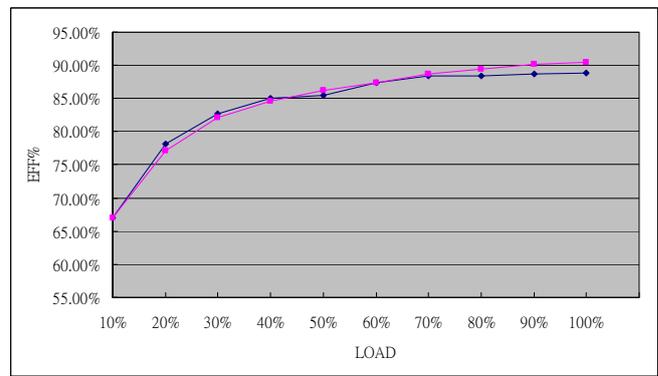

FSP120PWVS0240


VIN VS Efficiency

Input Voltage (V)	90	115	180	230	264
Efficiency (%)	88.78	91.27	93.11	93.52	93.81

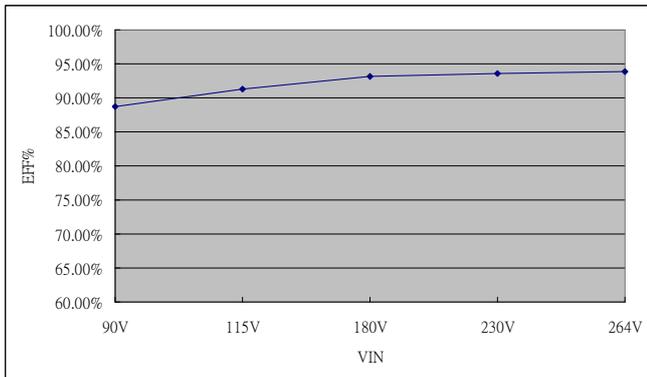

LOAD VS Efficiency

Load (%)	10	20	30	40	50
115V (%)	71.89	82.79	86.97	88.9	89.82
230V (%)	72.3	84.22	88.46	89.21	92.29
Load (%)	60	70	80	90	100
115V (%)	90.54	90.78	91.13	91.4	91.27
230V (%)	92.14	92.86	93.14	93.44	93.52

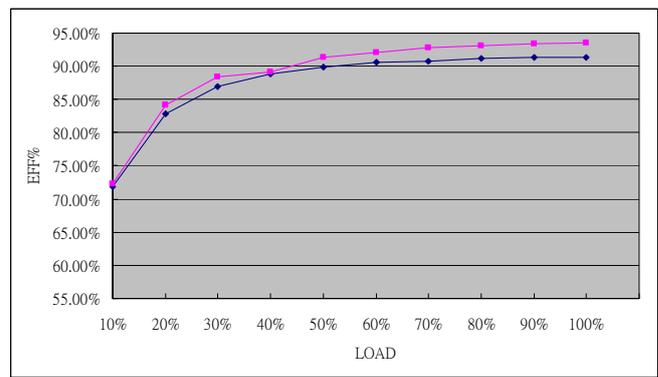


EFFICIENCY VERSUS LOAD

FSP120PWVS0480

VIN VS Efficiency

Input Voltage (V)	90	115	180	230	264
Efficiency (%)	88.56	91.86	93.20	93.76	93.61

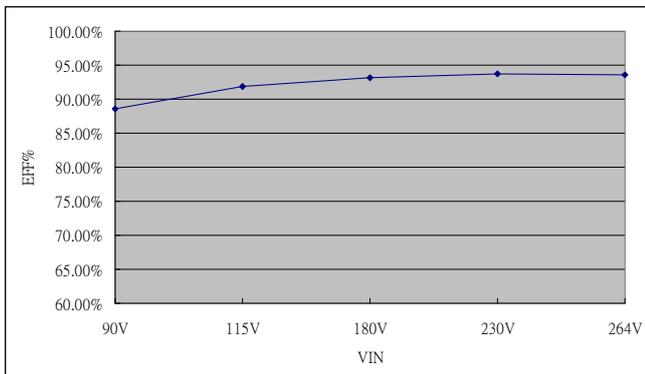

LOAD VS Efficiency

Load (%)	10	20	30	40	50
115V (%)	74.99	83.9	87.25	89.17	90.01
230V (%)	67.31	79.29	84.97	88.18	89.99
Load (%)	60	70	80	90	100
115V (%)	90.69	91.18	91.46	91.84	91.86
230V (%)	91.24	92.15	92.84	93.36	93.76

